

Digital PMR446

Digital (16ch)

A new era for

Analogue (8ch)

6.25kHz

licence-free radio

DIGITAL

Digital **16ch+**
Analogue **8ch**



- A first for Europe and the World*
- 6.25kHz ultra narrow channel spacing
- No licence** is required to use the radio
- Digitally modulated secure conversation for commercial and private users
- 32-code status messages for exchanging a short message

URGENT

PICKUP


- Common ID code for group communication
- Compatible with existing analogue PMR 446 channels with CTCSS/DTCS tones
- Large capacity Lithium-Ion battery with 2-step power saver
- Compact, lightweight design and tough body
- Hands-free operation with optional headset
- Optional programming software allows quick and simple settings of radio parameters

(* Researched by Icom as of February 2006

**Simple licence or application may be required in some countries)


■ 6.25kHz Spectrum Efficiency

Digital PMR 446 utilises 4FSK/FDMA modulation and 6.25kHz digital narrow channel spacing, which is half the channel spacing of the existing analogue PMR 446 system. This way, the 100kHz band width allocated for digital PMR 446 is efficiently divided into 16 channels, or twice the current analogue voice channel capacity.



■ 32-Status messages

32 codes of pre-fixed status messages can be sent and received. 16-character messages and 6 types of alert beeps that sound for call reception, are programmable for each message with optional cloning software, CS-F4029.

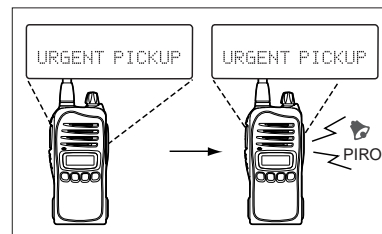

SPECIFICATIONS

- Frequency range (MHz) :
PMR 446 446.00625–446.09375
Digital PMR 446 446.103125–446.196875*
- Number of channels :
PMR 446 8 ch
Digital PMR 446 16 ch
- Channel spacing : 12.5kHz (PMR 446),
6.25kHz (Digital PMR 446)
- Power supply requirement : 7.2V DC (nominal)
- Current drain (at 7.2V DC; approx.):
Transmit High (0.5W) 0.5A
Receive AF max. 350mA
Stand-by 80mA (PMR 446)
115mA (Digital PMR 446)
- Operating Temp. range : –25°C to +55°C
- Dimensions (W×H×D) : 53×195×32.5 mm
(Fixed type antenna included)
- Weight (with BP-231) : 280g (approx.)
- Output power : 0.5W (ERP)


- External MIC connector : 3-conductor 2.5 (d) mm /2.2kΩ
 - External SP connector : 2-conductor 3.5 (d) mm /8Ω
 - Audio output power : 0.5W typical at 5% distortion with an 8Ω load
 - Communication range* : Approx. 3km (Wide open space)
- * Communication range may differ depending on operational environment or weather conditions, etc.

Supplied accessories: (May differ according to version)

- Battery pack, BP-231
- Belt clip, MB-94
- Battery charger, BC-160
- AC adapter, BC-145E/UK

* As of February 2006, some countries have yet to allocate the 446.1–446.2MHz digital PMR 446 frequency range. We suggest you confirm the allocation status in your country before you use.

Measurements made in accordance with ETS 300 296 for PMR 446 and EN 301 166-2 for digital PMR 446. All stated specifications are subject to change without notice or obligation.

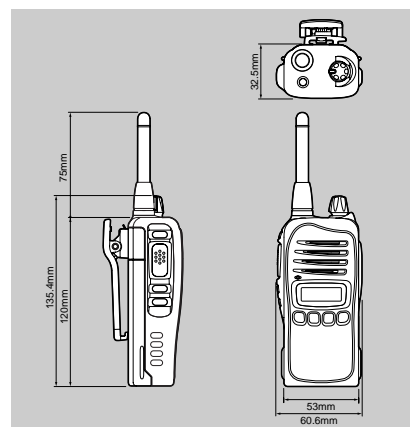

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



Battery packs	Type and capacity	Operating time*
BP-230	Li-Ion 7.4V/ 800mAh	5.7/7 hours
BP-231	Li-Ion 7.4V/1150mAh	8/10.4 hours
BP-232	Li-Ion 7.4V/2000mAh	14/18 hours
BP-240	AAA (LR03) batteries × 6	–

* Digital/analogue. Tx: Rx: standby=5:9:50. Power save on. Operating time is approximate time (at 20°C).

SPEAKER-MICROPHONES



HM-153L: Durable earphone-microphone with revolving clip.
HM-158L: Compact and durable body with screw connector.
HM-159L: Full size durable microphone with revolving clip.

REGULAR CHARGER



BC-171 DESKTOP CHARGER + BC-147E AC ADAPTER
Charges the battery pack in 8–10 hours (approx.). Coming soon.

RAPID CHARGER



BC-160 DESKTOP CHARGER + BC-145E/UK AC ADAPTER
Charges the BP-231 in 2 hours (approx.).
BC-119N + AD-106 + BC-145E/UK is also available.



BC-121N MULTI-CHARGER + AD-106 CHARGER ADAPTER + BC-157 AC ADAPTER
Rapidly charges up to 6 battery packs (Six AD-106s are required). Charging time: 2 hours (approx.) when BP-231 is attached.

HEADSETS and PTT/VOX UNIT



HS-94: Earhook headset with flexible boom microphone.
HS-95: Behind-the-head headset with flexible boom microphone.
HS-97: Throat microphone fits around your neck and picks up speech vibration.
VS-1L: PTT/VOX unit. Required when using these headsets with the transceiver.

EARPHONE

SP-13: Provides clear audio in noisy environments.

CLONING SOFTWARE AND CABLES

CS-F4029: Allows quick and simple setting from a PC.
OPC-478/OPC-478U: PC to transceiver programming cable. (OPC-478: RS-232C type, OPC-478U: USB type)

BELT CLIPS

MB-93: Swivel type belt clip.
MB-94: Alligator type. Same as supplied.

LEATHER BELT HANGERS

MB-96N: Swivel type belt hanger.
MB-96F: Fixed type belt hanger. For use with MB-94.

DC POWER CABLE

OPC-656: Replaces AC adapter BC-157 when using DC power with battery charger, BC-121N. (12–16 V DC required)